

# SIEMENS

# SIEMENS

issued by  
BenQ Mobile GmbH & Co.OHG  
Haidenauplatz 1  
D-81667 Munich

BenQ Mobile GmbH & Co.OHG  
All rights reserved. Subject to availability.  
Rights of modification reserved.  
Manufactured by BenQ Mobile GmbH & Co.OHG  
under trademark license of Siemens AG

[www.siemens.com/sxg75](http://www.siemens.com/sxg75)



Designed for life

**SXG75**

---

Safety precautions .....	2	Voice mail .....	38
Phone overview .....	5	Internet .....	38
Display symbols .....	7	Games .....	40
Getting started .....	8	Settings .....	40
Switch phone on/off, enter PIN .....	11	Organiser .....	49
General instructions .....	12	Extras .....	50
Security .....	16	Media player .....	51
Text entry .....	17	My stuff .....	53
Calling .....	20	Mobile Phone Manager .....	54
Contacts .....	25	Customer Care .....	55
Call records .....	29	Care and maintenance .....	57
Camera .....	30	Product data .....	58
Create message .....	31	SAR .....	59
Inbox .....	33	Guarantee certificate (UK) .....	60
Message lists .....	35	Guarantee certificate (IRL) .....	61
Message settings .....	36	License Agreement .....	62
		Index .....	65

This is a summarised version of the User Guide. The complete version can be found on the Internet at this address:

[www.siemens.com/sxg75](http://www.siemens.com/sxg75)

# Safety precautions

## Information for parents

Please read the operating instructions and safety precautions carefully before use. Explain the content to your children and the hazards associated with using the phone.



Remember to comply with legal requirements and local restrictions when using the phone. For example, in aeroplanes, petrol stations, hospitals or while driving.



Mobile phones can interfere with the functioning of medical devices such as hearing aids or pacemakers. Keep at least 20 cm between phone and pacemaker. When using the mobile phone hold it to the ear which is further away from the pacemaker. For more information consult your doctor.



The ringtones (page 40), info tones (page 45) and hands-free talking are reproduced through the loudspeaker. Do not hold the phone to your ear when it rings or when you have switched on the hands-free function (page 22). Otherwise you risk serious permanent damage to your hearing.



Only use original Siemens batteries (100% mercury-free) and charging devices. Otherwise you risk serious damage to health and property. The battery could explode, for instance.



Do not look at the LED (e.g. activated infrared port, flash LED) with optical magnifiers because of radiation.

This product complies with IEC/EN 60825-1 "Safety of Laser Products" for LED Class 1M products; such products are safe under reasonably foreseeable operating conditions.



Small parts such as the SIM card, sealing stop, lens ring and lens cap as well as the RS MultiMediaCard can be dismantled and swallowed by small children. The phone must therefore be stored out of the reach of small children.



The mains voltage specified on the power supply unit (V) must not be exceeded. Otherwise the charging device may be destroyed.

The power supply must be plugged into an easily accessible AC mains power socket when charging the battery. The only way to turn off the charging device after charging the battery is to unplug it.



Do not open the phone. Only replacing the battery, SIM card and RS MultiMediaCard is permissible. You must not open the battery under any circumstances. Any other changes to this device are strictly prohibited and will invalidate the operating licence.



All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.

This crossed-out wheeled bin symbol on the product means the product is covered by the European Directive 2002/96/EC.

The correct disposal and separate collection of your old appliance will help prevent potential negative consequences for the environment and human health. It is a precondition for reuse and recycling of used electrical and electronic equipment.

For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.



The phone may cause interference in the vicinity of TV sets, radios and PCs.



Do not place the phone near to electromagnetic data carriers such as credit cards and floppy disks. Information stored on them could be lost.



Use only Siemens original accessories. This will avoid potential risks to health or property and ensure compliance with all relevant regulations.

Improper use will invalidate the guarantee!  
These safety instructions also apply to Siemens original accessories.

## Bluetooth®

Your phone has a Bluetooth interface. This makes it possible to establish a wireless connection of your phone with a headset of a car kit, or with other Bluetooth-enabled devices.







In order to establish a secure link between the devices and to prevent a third party from having access to your phone, you should observe the following points:

- The initial connection between two devices, what is called "pairing", should take place in familiar surroundings.
- Both devices must be able to identify themselves one time by using a password/PIN. To ensure sufficient security, you should choose a 16-digit number combination for a password that would be difficult to guess (if a PIN has not been assigned).
- An automatic connection acceptance ("connection without confirmation") should only be used in exceptional cases.
- In general, only trustworthy devices should be linked in order to minimize security risks.
- You should restrict the "visibility" of your phone if possible. This will make it much more difficult for unknown devices to establish a connection with your phone. To do this, in the Bluetooth menu, set the option **Visib.to others** of **Always visible to Not visible** (page 42).


- The name of your phone is transmitted in a Bluetooth connection. The factory default is the "Bluetooth ID". The first time Bluetooth is activated, or later in the Bluetooth menu, you can change this name (**My BT name**, page 42).
- If Bluetooth is not needed, this function should be deactivated.

Before using Bluetooth accessories, or a mobile phone inside a vehicle, check the vehicle user guide for any limitations on the use of these products.





# Phone overview

- ①  **Video call key**  
Press the video call key. The phone is in video call mode.
- ②  **WAP key**  
**Open the browser if not predefined.**
- ③  **Call key**  
Dial the number/name displayed/ highlighted, take calls.
- ④  **On/Off/End key**
  - Switched off: Press and **hold** to switch on.
  - During a conversation or in an application: press **briefly** to finish.
  - In menus: Press and **hold** to go back to standby mode.
  - In standby mode: Press and **hold** to switch off.  
Press **briefly**: Power down menu.
- ⑤ **Softkeys**  
The current functions of these keys are shown in the bottom line of the display as **Text**/symbol.
- ⑥  **Task key**  
Press **briefly**: open task switcher.  
Press and **hold**: open main menu.
- ⑦  **Clear key**  
Text input: Clear characters one by one in text input mode. Press and **hold** to delete text quickly.  
Lists/Input fields: Delete highlighted item(s).


## ⑧ Navigation key


-  Press the navigation key to open the main menu or start an application/ function (page 13).

## ⑨ In standby mode:

-  Press **briefly**: Open the user profiles.  
Press and **hold**: Start the voice dialling.
-  Open the Contacts.
-  Open the Calendar.
-  Start the FM radio.

## In lists, messages and menus:

-  Scroll up and down.

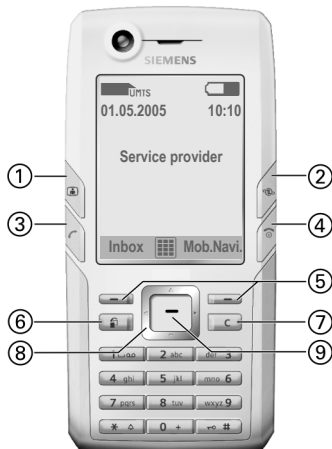

## ① Earpiece

## ② Integrated antenna

Do not obstruct the phone above the battery cover unnecessarily. This reduces the signal quality.

## ③ Camera lens

④  Camera key⑤  Media player key

## ⑥ + / - Volume control

## ⑦ Display

## ⑧ RS MultiMediaCard tray

## ⑨ Infrared interface (IrDA)

⑩  Ringtone

- Press and **hold** in standby mode: Switch all audible signals on/off (except alarm). Vibration is activated automatically.
- Press and **hold** on incoming call: Switch off ringtone for this call only.

⑪  Key lock

Press and **hold** in standby mode to switch key lock on/off. Only emergency numbers can be dialed.

While dialling: Enter wildcard "?".



## ⑫ Connection socket

For charger, headset, flash, etc.

## ⑬ Connection for external antenna





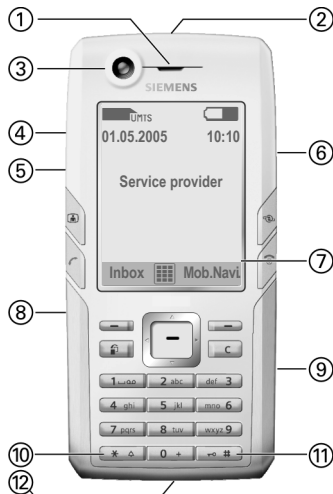















## ⑭ Camera lens





## ⑮ Loudspeaker








# Display symbols

## Display symbols (selection)









	Signal strength
	Battery charge level, e.g. 50%
	Contacts
	Call records
	Internet/Service provider portal
	Camera
	Messages
	Organiser
	Games
	Media player
	Video telephony
	Extras
	My stuff (file management)
	Settings
	All calls are diverted
	Ringtones off
	Alarm set
	Keypad locked
	Auto answer feature on
	IrDA transmission

	Bluetooth during data transfer
	Call accepted at Bluetooth device
	Instant Message login
	Mobile Navigation

## Events (selection)

	SMS memory full
	Missed calls
	Phone memory full
	No network access
	Inbox

## Message symbols (selection)

	Unread
	Draft
	Sent
	MMS received
	MMS with DRM contents (page 13)
	E-Mail forwarded
	E-Mail with attachment
	Voice mail received




## Getting started

Your phone's display is supplied with a protective film. Remove this film slowly before using the phone.

In rare cases, static discharge may cause discolouration at the edges of the display. However, this will disappear within approx. 10 minutes.


### Inserting the SIM card/ battery

The service provider supplies you with a SIM card on which all the important data for your line is stored. If the SIM card has been delivered in credit-card size, snap the smaller segment out and remove any rough edges.




- Place the SIM card in front of the slot with the contact surface facing **downwards**. Then press the SIM card slightly to push it in (ensure that the chamfered corner is in the correct position).

- Insert the battery sideways into the phone ①, then press it downwards ② until it engages.



- To remove, press the retaining tab on the side of the battery, then lift the battery out.



- Place the cover in position, then push it towards the front in the direction indicated by the arrow, until it clicks into place.

Please switch off your phone before removing the battery!

## RS MultiMediaCard™

The RS MultiMediaCard gives your phone a very large memory capacity. This allows you to save picture/video files and sound recordings, for example. However, you can also use this MultiMediaCard like a floppy disk to save any other files.

**RS MultiMediaCard™** is a trademark of the MultiMediaCard Association.


### New RS MultiMediaCard

- Create a backup copy of the data on the old card on a PC.
- Format the new card.
- Copy the data from the PC onto the new card.

## Inserting/removing the RS MultiMediaCard

Please observe the manufacturer's operating instructions that come with the RS MultiMediaCard.

- Press on the tray. The tray for the card is opened. You can remove the tray.
- Insert the card on the tray (ensure that the chamfered corner is in the correct position ①). Insert the tray with the card into the phone ② until it snaps in.




Before removing the **RS MultiMediaCard**, carry out the **Eject card** function in the settings menu (page 46). This prevents any possible data loss.

## Charging the battery

The battery is not fully charged when delivered. Plug the charger cable into the bottom of the phone, plug the power supply unit into a mains power socket and charge for at least **two hours**.

**Only use the plug-in power supply included in delivery!**

As an alternative, the battery can be charged via the USB port (Accessories, page 49).



Display during charging.

## Charging time

An empty battery is fully charged after about 2 hours. Charging is only possible within a temperature range of +5 °C to 45 °C. If the temperature rises/falls 5 °C above/below this, the charge symbol flashes a warning. The mains voltage specified on the power supply unit must not be exceeded.

**Do not remove the battery unnecessarily, and where possible, do not end the charging process prematurely.**

The power supply unit heats up when used for long periods. This is normal and not dangerous.

If the battery is removed for longer than 30 seconds, the clock must be reset.

## Operating time

The operating time depends upon the respective conditions of use. Extreme temperatures considerably reduce the phone's standby time. Avoid placing the phone in the sun or on a heater.

Call time:

- UMTS: up to 300 minutes
- GSM: up to 360 minutes

Standby time:

- UMTS: up to 400 hours
- GSM: up to 400 hours

## Charge icon not visible

If the battery has been discharged fully, the charge icon is not immediately visible when the power supply is plugged in. It will appear after up to two hours. In this case the battery is fully charged after 3 to 4 hours.

## Display while in service

Charge level display during operation (empty–full):



## Battery low warning

When the battery is almost empty you are warned twice. The first warning appears when the battery has 10 minutes of power remaining.

The second warning appears when the battery has 1 minute of power remaining.

**OK**

Press to confirm warning.

## Power off

If battery is completely empty, the phone switches off automatically.

# Switch phone on/off, enter PIN

## Switching phone on/off

### Switching phone on



Press and **hold** On/Off/End key to switch phone on.

Enter PIN or confirm request (page 17).

The phone switches on automatically when:

- you charge phone via USB **or**
- an alert or calendar event appears.

**Yes** Press to activate.

**Or**

**Offline** Press to start in offline mode (page 12).

### Entering PIN

The SIM card can be protected with a 4 to 8-digit PIN.



Enter PIN using number keys. Asterisks appear to ensure nobody can read your PIN on the display. Correct with .

**OK** Confirm. Logging on to the network will take a few seconds.

Change PIN .....page 16

Clear SIM card barring .....page 17

### Switching phone off



Press and **hold** On/Off/End key.

**Or**



Press **briefly** and select one of the following options.

**Switch off** Switch phone off. Phone switches on automatically if alarm or calendar event occurs.

**Offline mode** Phone is not switched off, but has no connectivity (page 12).

## Emergency number (SOS)

### Only to be used in real emergencies!

By pressing the softkey **SOS** you can make an emergency call on any network **without** a SIM card and without entering a PIN (not available in all countries).

If key lock is active (page 6) only emergency numbers can be dialled: Enter number and press **SOS**.

## Switching on your phone for the first time

When you switch on the phone for the first time or after the battery has been removed, you are prompted to set the time/date.



Select if you want to enter time/date.

### Time/Date

When you first switch on, set the clock and date so that it displays the correct time. You will not have to make this setting again.



First enter date (day/month/year), then time (24 hours).



Press to update time and date.

### Time zones



Select desired setting and change time zone in world map.



Select a city in the selected time zone.

#### Options

Open menu and select **Set time zone** to save.

Further options and settings on page 46.

## General instructions

### Standby mode

The phone is in **standby mode** and is **ready for use** when the name of the service provider appears on the display.



Press and **hold** the On/Off/End key to return to standby mode from any situation.

### Signal strength



Strong signal strength.



A weak signal reduces the call quality and may lead to loss of the connection. Change your location.

### Offline mode

In offline mode you can operate many phone functions but you are not connected to any network (you are not available for incoming calls and you cannot initiate a call).

Switching between offline and online mode:



Press **briefly** and select **Offline mode/Online mode**.



Confirm request.

## Digital Rights Mgmt. (DRM)

Remember that your telephone has digital rights management. The use of downloaded pictures, sounds or applications can be restricted by the suppliers, e.g. copy protection, use for a limited period of time only, number of times they can be used etc.

## User guide

### Symbols

The following symbols are used to explain operation:



Enter numbers or letters.



On/Off/End key



Call key

#### Options

Displays a softkey function.



Press the navigation key, to call up the menu for example.



Display navigation function. Press navigation key in the direction indicated.



Function dependent on service provider, may require special registration.

## Main menu

The main menu is displayed graphically with symbols:



Call up from standby mode.




Select application symbols.



Start application.

## Tabs

Tabs allow fast access to information and applications.



## Navigation key

The symbol in the centre of the lower line of the display shows the current function when the navigation key is pressed down vertically.

## Menu control

The steps needed to reach a function are shown in a **condensed form** in the user guide, e. g. to set ringtones




This comprises the following steps:



Open main menu.



Select  to open Settings menu.



Confirm selection.



Select **Ringtones** function.



Confirm selection.

## Standard functions

### Options menu

The list contains functions that are offered in several options menus.

**Options** Open menu.

<New entry>	Create new entry.
Save	Store entry.
Change	Open options list. Select option and confirm.
View	Display entry.
Info	Display properties of selected entry.
Details	Display additional information about the file.
Delete/ Delete all	Delete entry/delete all entries after confirmation.
Exit	Exit application.
Edit	Open entry to edit/open input field to edit.

Text input meth.	Open input method menu (page 18).
Text edit menu	Open text edit menu (page 18).
Sort by	Select sort criteria.
Set as	e.g. set picture as wallpaper, melody as ringtone.
Rename	Rename selected entry.
Send	Select transmission type (MMS, SMS, Instant Message, e-mail, Bluetooth or IrDA).
Create message	Select transmission type and create message.
Reply/ Reply to all	The sender becomes the recipient, "Re." is placed in front of the subject matter.
Capacity/ Memory status	Display memory status for respective application, phone, SIM card or the <b>RS MultiMediaCard</b> . If memory is insufficient start the <b>Memory assistant</b> .

### Fast list search

Pressing number keys while you are in alphabetically ordered lists opens a fast search window.






Enter text to jump quickly to the entry that corresponds most closely with the entered text.

## Memory assistant

The memory assistant is launched automatically if memory is low.





All saved folders and files in phone memory and on **RS MultiMediaCard** (page 9) are listed.




## Mark mode

In some applications (e.g. Contacts/My Stuff) one or more entries in a list can be highlighted to carry out a function jointly.



## Mark options


Depending on the actual situation, different functions will be offered.



Mark/ Unmark	Mark/unmark selected entry.
Mark all	Mark all entries.
Unmark all	Unmark all marked entries.
Delete marked	Delete all marked entries.
Send marked	Send marked messages (e.g. e-mails from draft folder).
Retrieve marked	Retrieve marked e-mails (if only header is retrieved).

## Task switching

You can switch from the current application to the main menu, standby mode or to any open application.



You can directly switch to the Main Menu, Home or to any open application:



If you are holding a call, select **Current call** to return to the call.



# Security

The phone and SIM card are protected against misuse by several security codes.

**Keep these confidential numbers in a safe place where you can access them again if required.**

## PIN codes

PIN	Protects your SIM card (personal identification number).
PIN2	This is needed to set the charge detail display and to access additional functions on special SIM cards.
PUK PUK2	Key code. Used to unlock SIM cards after the wrong PIN has been entered repeatedly.
Phone code	Protects your phone. Must be entered at the first security setting.

 →  → Security → PIN codes  
→ Select function.

## PIN control

The PIN is usually requested each time the phone is switched on. You can deactivate this feature but you risk unauthorised use of the phone. Some service providers do not permit deactivating the control.

**On/Off**      Activate/deactivate PIN control.



Enter PIN code.




Confirm.

## Change PIN

You can change the PIN to any 4 to 8-digit number you find easier to remember.



Enter current PIN code and confirm with .



Enter **new** PIN code and confirm with .



Re-enter **new** PIN code and confirm with .



Confirm.

## Change PIN2

(Display only if PIN2 is available).

Proceed as with **Change PIN**.

## Change phonecode

You define the phone code (4 to 8-digits) when you call up a phone-code protected function for the first time. It is then valid for all phone-code protected functions.

To change phone code proceed as with **Change PIN**.

Following the third unsuccessful attempt, access to the phone code and the functions that use it is denied. Contact the Siemens Service Centre (page 55).


## Clearing SIM card barring

If the PIN is entered incorrectly three times, the SIM card is barred.




Enter **new** PIN code and confirm with .



Enter **new** PIN code again and confirm with .



Enter PUK code (MASTER PIN) provided by your service provider with the SIM card in accordance with the instructions and confirm with .



Confirm.

If the PUK (MASTER PIN) has been lost, please contact your service provider.

## Preventing accidental activation

Even if PIN use is deactivated (page 11) confirmation is required to switch on the phone.

This prevents accidental activation of the phone, e.g. when you are carrying it in a bag or when you are travelling in an aircraft.



Press and **hold**.



Press. The phone switches on.



Press or take no action. The phone does not switch on.

## Connecting to PCs

You can connect your phone to a Windows® PC using IrDA, Bluetooth or a data cable. The Windows® PC program MPM (Mobile Phone Manager, page 54) enables you to back-up data on your Windows® PC and to synchronise the contacts with Outlook®, Lotus Notes™ and other Siemens phones. You can download the Mobile Phone Manager from the Internet at:

[www.siemens.com/sxg75](http://www.siemens.com/sxg75)

## Text entry

### Text entry without T9

Press number key repeatedly until the required letter appears. After a brief interval the cursor will advance. Example:



Press **once briefly** to write the letter **a**, twice to write **b** etc. Press and **hold** to write the number.



Press **briefly** to delete the letter left of the cursor or marked text. Press and **hold** to delete text quickly.



Move the cursor (forwards/back).



Press **briefly**: Swap between: *abc, Abc, ABC, T9 abc, T9 Abc, T9 ABC, 123.*

Press and **hold**: Input method menu is displayed.

The sequence of input methods is language-dependent.



Press **briefly**: Special characters are shown.

Press and **hold**: Open edit menu.



Press **once/repeatedly**:

., ? ! ' " 0 + - ( ) @ / : \_

Press and **hold**: inserts 0.



Press to insert space.

Press twice to insert line feed.

## Special characters



Press **briefly**.

1)	¿	¡	_	;	.	,	?	!
+	-	"	'	:	*	/	(	)
¤	¥	\$	£	€	@	\	&	#
[	]	{	}	%	~	<	=	>
	^	`	§	Γ	Δ	Θ	Λ	≡
Π	Σ	Φ	Ψ	Ω				

1) Line feed



Navigate to characters.



Confirm.

## Text edit menu



Press and **hold**:

Insert symbol, Spell word, Mark text, Copy/Paste, Input language

## Selecting input language

Select the language in which you want to compose your message.

### Options

Open edit menu and select **Input language**. Then select language and confirm.

If you select **Automatic**, the **Input language** is based on the **Display language**.

## Marking text

You can highlight text in order to copy and paste it to a different place.



Press and **hold**. The edit menu is displayed:  
**Mark text, Copy, Paste.**

## Text entry with T9

"T9" deduces the correct word from the individual key entries.

## Activating, deactivating T9



Press and **hold**.

Select desired input mode.



### Select

Activate/deactivate T9.

## Writing with T9

Finish a word without looking at the display.

Simply press the keys **once** where the relevant letter is located.



 /  A blank or moving the cursor to the right ends a word.



Do not use special characters such as Ä. Use standard characters instead, e.g. A; T9 will do the rest for you.

T9® Text Input is licensed under one or more of the following: U.S. Pat. Nos. 5,187,480, 5,818,437, 5,945,928, 5,953,541, 6,011,554, 6,286,064, 6,307,548, 6,307,549, 6,636,162 and 6,646,573; Australian Pat. Nos. 727539, 746674 and 747901; Canadian Pat. Nos. 1,331,057, 2,302,595 and 2,227,904; Japan Pat. No. 3532780, 3492981; United Kingdom Pat. No. 2238414B; Hong Kong Standard Pat. No. HK1010924; Republic of Singapore Pat. No. 51383, 66959 and 71979; European Pat. Nos. 0 842 463 (96927260.8), 1 010 057 (98903671.0), 1 018 069 (98950708.2); Republic of Korea Pat. Nos. KR201211B1 and KR226206B1. People's Republic of China Pat. Application Nos. 98802801.8, 98809472.X and 96196739.0; Mexico Pat. No. 208141; Russian Federation Pat. No. 2206118; and additional patents are pending worldwide.

## T9 word suggestions


If several options are found in the dictionary for a key sequence (a word), the most probable is displayed first. The word must be shown **highlighted**. Then press

 T9  The displayed word is replaced with a different word. If this word is also incorrect, press again


 T9  Repeat until the correct word is displayed.



To add a word to the dictionary:


 Select.

The last suggestion is deleted and the word may now be entered without T9 support. Press  to add it automatically to the dictionary.

## Correcting a word

 Move left or right, word by word, until the required word is **highlighted**.

 T9  Scroll through the T9 word suggestions again.

 Deletes the character to the left of cursor **and** displays a new possible word!

Within a "T9-word", individual letters may not be edited without first removing the T9 status. In most cases it is better to rewrite the complete word.

Set a full stop. Word is concluded if it is followed by space. Within a word, full stop represents an apostrophe or hyphen:  
e.g. **provider.s** = provider's.

### Input method

Press **briefly**: Switch between: abc, Abc, T9 abc, T9 Abc, 123. Status shown in top line of display.  
Press and **hold**: All input variants are displayed.

### Special characters

Press **briefly**: Select special characters (page 18).  
Press and **hold**: Open edit menu (page 18).

## Text templates

→ → Template

Text templates are short excerpts of texts that you can insert in your messages (SMS, MMS).

## Calling

With your phone you can make conventional (voice) calls as well as video calls. However, it is not possible to make a voice call and a video call at the same time.

## Video calls

To initiate a video call (in standby mode):



The phone switches to video call mode and you can enter a number (see Dialling with number keys).

### Or



Enter the number (always with prefix/international dialling code).



Press the video call key.

The phone switches to video call mode.

You can also decide to make a video call **after** you have already entered a number or selected a number from a call list.

## Dialling with number keys



Enter the number (always with prefix/international dialling code).



Or



Press the video call key to make a video call.

The displayed number is dialled.

## Ending a call



Press the End key **briefly**. Press this key even if the person on the other end of the line has hung up first.

## Setting the volume



Regulate the volume.

## Redialling previous numbers



Press the Call key.

The list of previously dialled numbers is displayed:



Select the number.



Press the Call key **again** (not in video call mode).

Or



Press the video call key to make a video call.

## Accepting a call



Press.

If the incoming call is a video call and **Show my image** is deactivated (default, page 45) **Do you want to show your video image?** is displayed. You have the following options:

**Yes**

Your video is shown to the caller.

**No**

The video mute picture is shown to the caller (**Select image**, page 45).

## Rejecting a call



Press **briefly**.

### Warning!

Please make sure you have accepted the call before holding the phone to your ear. This will avoid damage to your hearing from loud ringtones.

### Additional information




Press and **hold** to switch silent mode on/off.



Press and **hold** to switch key lock on/off.

## Handsfree talking

**Options** Open menu, select **Speakerphone** and confirm with .

### Warning!

Always switch off "handsfree talking" before holding the phone to your ear! Otherwise, you will damage your hearing!

### Additional information

During a video call the speakerphone is activated by default.


## Swapping between 2 calls



(not during video calls)

### Establish a second connection



Dial the new number and press . The current call is put on hold.

When the new connection is established you can swap between calls:

**Options** Open menu and select **Swap**.

Or





Press.

### Incoming calls during a call

You will hear a special tone during the call (page 44). You have the following options:

### Accepting the waiting call in addition to the first

**Swap** /  Accept the waiting call. The current call is put on hold.

To swap between the two calls when two connections are established, always press .

### Rejecting the waiting call

**Reject** Press.

### Accepting the waiting call, ending the current call



End the current call.



Accept the new call.

### Ending calls



Press the End key **briefly**.

Or

**Options** Open menu and select **Drop**.

After the **Return to held call?** display, you have the following options:

**Yes** Accept the held call.

**No** End the held call.

## Conference



(not during video calls)

Call up to 5 parties one by one and link them together in a multiparty call.

Once a call has already been established:

**Options** Open menu and select **Hold call**. The current call is put on hold.



Dial a new number. When the new connection is established ...

**Options** ... open menu and select **Conference**. The held call is joined.

## End

### Ending all calls



All calls in the multiparty conversation are ended when the End key is pressed.

### Ending one call

See Ending calls, page 22.

## Private call

You can remove a party from a conference and make a private call to that party while the conference is put on hold.

**Options** Open menu and select **Private**. Then select the entry for the private call.

You can swap between the private call and the conference:

**Options** Open menu and select **Swap**.

When your private call is finished you have the following options:



End the private call and return to the conference.

Or

**Options** Open menu and select **Conference**. The private call is joined to the conference again.

## Call options


The following functions are only available during a call:

**Options** Open menu.

### Mute call/ Mute sound

If switched off, the person on the other end of the line cannot hear you (muting).

Also:

Press and hold .

In video calls your video is still shown on the other end of the line.

### Speakerphone

Call via the loudspeaker.


### Upgrade to vid/ Switch to voice

Change the current voice call to a video call or vice versa. The current call is ended and a new connection with the same partner is established.

### Transf ac- cess'ry/ Transfer phone

Switch the sound of the current call to the headset and back to the phone.



Add to contacts	Select To a new contact/ To exist. contact. Select number type to store the number in the contacts. Confirm save command with  .
<b>Not during video calls:</b>	
Hold call	Hold current call.
Swap	Swap between calls.
Conference	(see page 22)
Drop	End a call in a conference.
Private	Make private call in a conference.
DTMF	Enter tone sequences (numbers) for remote inquiries to an answering machine.
<b>Only during video calls:</b>	
Mute video	If switched off, the incoming video is muted and the video mute picture is sent (Select image, page 45)
Pause inc./ Pause outg.	Pause the incoming video (of the other party) or outgoing video (yours). The menu entry changes to Resume inc./ Resume outg.
Switch camera	Switch between front and rear camera.
Full/splt screen	Select the video presentation on your display.

Frame rate	Adjust how many frames per second the camera will capture.
White balance	Adjust the sensitivity to light.
Flicker adjustm	Adjust the sensitivity to indoor lightening flicker rate.
Send picture/ Send video	Select a picture/video from My stuff and show it to the person on the other end of the line.

## Tone sequences (DTMF)

You can enter control codes (numbers) for remote access to an automatic answering machine **while another connection exists**. These inputs are transmitted directly as DTMF codes (control codes).

# Contacts

You can store contacts with a variety of phone and fax numbers as well as additional address details.

The contacts may contain the following types of entries:

- Contacts saved on the phone (page 25).
- SIM contacts saved on the SIM card (page 27).
- Distribution lists: short-cuts for communication with more than one person.
- Groups: contact categories (e.g. shared ringtone).



Or



Open Contacts.

For fast access, contacts are organised on 4 tabs (Contacts, Groups, SIM contacts, Filter).

## Dialling a contact



Call selected contact.

Or



Make (video) call.

Or



Press and **hold** to activate voice dialling.

### Contact selected



Call the default/video enabled number. If no default number is stored, select which number to call.

### SIM contact selected

Call the number. If several numbers are stored, select which number to call.

### Several numbers selected

If several contacts or a distribution list is selected:

- The call key , and the video call key  have no effect.

## Contacts

Each contact may consist of 4 numbers and e-mail addresses, 2 URLs, fax numbers and postal addresses. You can set one value as default for each type.

### New entry

<New entry>

Select.



Select the number type.

The possible input fields are organised on 5 tabs.

The following tabs are displayed:

<b>General info</b>	First and last name, important numbers (private, business, mobile phone).
<b>Private</b>	E-mail address, fax number, address and notes.
<b>Business</b>	Office information and address.
<b>Personal</b>	Audio/video ringtone, picture, group, birthday and display name.

Within the tabs:



Select input fields.




Fill in input fields.

At least one name must be entered. The name of each contact must be unique. Always enter the number with prefix.


### Assign media files

In some input fields (ringtone, video, picture) you can assign audio/video ringtones and pictures.



Select media field (e.g. picture) and confirm with .

### Save contact

**Options** Open menu and select **Save**. Confirm request with .

## Contact options

**Options** Open menu.

<b>Set as default</b>	Set selected field as default for that type.
<b>Create e-mail</b>	Send e-mail to selected contact(s).
<b>Switch tab...</b>	Select contact tab for more input fields.
<b>Add birthday/ Remove birthday</b>	Add/delete birthday.
<b>Set date</b>	Open calendar to currently entered date.
<b>Number field selected:</b>	
<b>Insert 2-s pause</b>	Insert pause ("P").
<b>Insert wildcard</b>	Insert wildcard ("?").
<b>Record voice tag</b>	Start recording voice tag (page 29).
<b>Play voice tag</b>	Start playback.
<b>Delete voice tag</b>	Delete voice tag.
Further options on page 28.	

## Groups

The following groups have already been created and can be renamed but not deleted: **Family, Friends, Office, VIP.**

### New group

You can add personal groups.

<New group>

Select and enter the name of a new group.

**Done**

Press to confirm.

### Add member



Select a group. The number of entries is displayed in the second line when highlighted.

**Options**

Open menu and select **Add new member**. A list of all contacts that are not already in the group is displayed.



Select new members and confirm with .

**Add**

Confirm selection.

### Edit group

**Options**

Open menu and select **Edit**.

You can rename the group and attach an audio ringtone and a picture (page 26).

## SIM contacts

Contacts saved on SIM card are managed on this tab. SIM contacts contain less information than contacts saved on the phone.

### New entry

<New entry>

Select to create a new entry.



Navigate to input fields.



Fill in input fields (name and up to 3 numbers).


### SIM/Protected SIM

Select storage location.



Select available number.

**Options**

Open menu and select **Save** and confirm request with .



Confirm save command.

### SIM options

**Options**

Open menu and select **Add more fields**.

Convert SIM contact to regular contact.

## Filter

The following filter criteria are available: Voice dialling, Video telephony, E-Mail, URL, Birthday, Stored on phone, Distribution lists.

A list is displayed with contacts that contain the chosen feature.

## Option menu

Depending on the actual situation, different functions will be offered. These functions can be applied to the entry currently selected as well as to multiple selected entries.

**Options** Open menu.

### Distribution lists

<b>New distr. list</b>	Enter name.
<b>Add to distr. list</b>	Add contact to a new or existing distribution list.
<b>Add new member</b>	Select contacts and add them to the distribution list.
<b>Remove from list</b>	Remove selected contact(s) from distribution list.

### Groups

<b>New group</b>	Enter name.
<b>Add to group</b>	Add contact(s) to new or existing group.

### Business card

<b>Create biz card</b>	Create a business card.
<b>Set as biz card</b>	Selected contact is set as business card.
<b>Undo biz card</b>	Convert selected business card to a regular contact.


### Media field selected

e. g. <b>Play ringtone</b>	Start playback. Same for video and picture.
----------------------------	---

e. g. <b>Replace ringtone</b>	Select new ringtone. Same for video and picture.
-------------------------------	--

e. g. <b>Remove ringtone</b>	Delete current ringtone from contacts. Same for video and picture.
------------------------------	--

### General options

<b>Synchronise</b>	Initiate synchronization.
<b>Open web site</b>	Load URL.
<b>Special numbers</b> 	Your provider may supply you with special numbers.
<b>Send contact</b>	Send contact as vCard.
<b>Set as vid. allow'd/ Undo vid.allow'd</b>	Only one number of the contact can be set as video allowed. Note that this option is not available for SIM contacts.
<b>Save options</b>	<ul style="list-style-type: none"> <li>• copy/move to SIM: Only SIM information is saved.</li> <li>• copy/move to phone.</li> </ul>
<b>Save location</b>	Select SIM/Phone as default save location.
<b>Duplicate</b>	Open new contact with duplicate information.
<b>Find</b>	Start search.
For standard functions see page 14.	

## Voice-activated dialling

You can dial numbers from the contacts by speaking the name. SIM contacts, distribution lists and groups cannot have a voice tag.

You can store about 100 voice tags. You can associate one voice tag to each number of a contact.

### Recording a voice tag

Record the voice tag in a quiet environment. The voice tag may be 3 sec. long.



Open the Contacts tab.



Select a contact.



Select number input field.

#### Options

Open menu and select **Record voice tag**.

#### Start

Start recording.

A short signal is sounded. Speak the name. Repeat the name after playback.

## Voice-activated dialling

Voice dialling must be enabled (page 45).



Press and **hold**.

Speak the name after the signal tone.

## Call records



→ Call records

The different call information is listed on 5 tabs:

**All calls, Dialed calls, Missed calls, Received calls and Time & charges.**



Navigate to tabs.

Each list displays the 100 most recent calls.

## Call log lists

Your phone stores dialed, missed and received calls for convenient redialling.

Audio and video calls are stored.

### Dial number



Select call log list (e.g. **Missed calls**).



Select entry.



Dial number (if available), make video call.

### Missed calls



The numbers of calls that you have received but not answered are stored for callback purposes.

## Time & charges

Display the charges and duration during a call. Set the currency and rate for charge display.

For the selected call type the following information is displayed: the date/time and the duration and charges. For all incoming and all outgoing calls the number of recorded calls is displayed, too.

## Camera

The phone supplies you with a front and rear camera (page 5).

Start the camera via the main menu:





Or



Press the side key to start the camera in standby mode and from other applications.

### Picture mode/Video mode

Select mode and confirm with /.

The current (preview) image is displayed.

You can also start the camera using the media player or MMS editor.

When video recording is started from MMS the maximum length will be the time allocated for messaging (10 seconds).

## Taking pictures/videos

### Settings prior to taking pictures/recording videos



Decrease/increase brightness. Brightness can be set in 7 levels (-3 to +3).



Zoom in/out in 7 levels.



## Taking pictures

Start the camera in picture mode.

 /  Take picture.

## Recording videos

Start the camera in video mode.

 /  Start recording. You can record up to 5 minutes.



**Pause / Resume** Control recording.

**Stop** End recording.

## Reviewing pictures/videos

 Confirm save notification. The picture is displayed.

The picture/video is saved with a name, the date and the time in the **Media player** folder (page 51).

 /  Open view finder to take another picture/record another video.

Or

**Discard** Delete picture/video and open view finder.

## Flash (Accessories)

If the flash is active, this is shown by a symbol in the display. The flash is constantly charged while connected to the telephone. This reduces the standby time.

## Create message

You can create SMS and MMS messages and e-mails.

 →  → Create message  
→ Select message type.

## SMS/MMS

### About SMS

You can transmit and receive long messages (up to 760 characters) on your phone. They are automatically divided into concatenated SMS messages (note higher charges).


### About MMS

The **Multimedia Message Service** (MMS) enables you to send texts, pictures/ videos and sounds in a combined message to another mobile phone or to an e-mail address. All elements of an MMS message are merged to a "slide show".

Ask your service provider whether this service is available. You may need to register for this service separately.

### Writing/sending an SMS


 →  → Create message  
→ SMS

 Enter text/add items.

**Options** Open menu and select Add recipient.




 Send message.

 Confirm.


If the SMS could not be sent successfully, press **Retry**.

## Writing/sending an MMS

 →  → Create message  
→ MMS

 Add items and/or enter text (up to 1024 characters).

 Send message.

 Confirm.

If the MMS could not be sent successfully, press **Retry**.


## SMS/MMS options

In the options menu you can add/remove recipients, pictures, templates, contacts or bookmarks or create new items. You can save messages as a draft. For MMS you can add items and a subject.


## E-mail

Your phone has an e-mail program (client). You can use it to create and receive e-mails.

 →  → Create message  
→ E-mail

 Enter text/add items.

**Options** Open menu and select **Add recipient**.

 Send message. The sending progress is displayed.

## Instant messaging

 →  → Instant messaging

This function allows text-based conversation with one or more users who are also registered for this service. This function is not offered by all service providers. Please refer to your service provider for further information.

Your dialogue partners are entered in the contact lists. When a connection has been established, these lists show who is available, whether they want to be disturbed and what mood they are in.


# Inbox

The inbox contains all MMS, SMS, CB, e-mail and WAP push messages received on the phone.



## Inbox structure

For fast access, the inbox is organised on three tabs: MMS/SMS/CB, e-Mail and WAP push messages.

Make a call: Select SMS, MMS or e-mail and press .

## Receiving messages

### SMS

If a new SMS is received a notification is displayed. New messages are saved in the Inbox automatically.

### MMS

An MMS is received in two steps: first the MMS notification, then the MMS.

If a new MMS is available for downloading, the MMS notification is displayed.

### CB

Some service providers offer information services (**C**ell **B**roadcast **S**ervice). If the function is activated (page 37), CB messages are received automatically.

## E-mail

E-mails are not received automatically. Before an e-mail can be read, it must be retrieved from the server (page 34).


## WAP push

WAP push messages are provided by special service centres. Depending on the current setting WAP push messages are received/rejected automatically.

If you receive the message that a software update is available, you can start a Device Manager session (page 46).

## SMS, MMS, CB



Select message and confirm with .

Numbers, bookmarks, e-mail addresses, vCards and other saveable objects are highlighted automatically.



Set volume.



Switch sound on/off.

Only MMS:



Navigate within a slide.



Switch to next/previous slide.




Play media file.

While in the inbox you have the following options: **View**, **Download message**, **Reply/Reply to all**, **Forward**, **Mark as unread**, **Add to Contacts**.

While reading a message you have the following options: **Send**, **Send MMS**, **Open link**, **Save link**, **Play again**, e.g. **Save sound** (Save downloaded file), **Call number**, **Save appoint..** Standard functions on page 14.

### Downloading ringtones and logos

You can receive links for downloading content with an SMS. Highlight this link and, by pressing the Call key , start the download. Remember that ringtones/logos may be protected (DRM, page 13).

## E-mail

Before an e-mail can be read, it must be retrieved from the server.

### POP3 account

The inbox on the phone contains all e-mails that are in the inbox on the POP3 server.

### IMAP4 account

The inbox lists e-mails as well as subscribed folders (e.g. mailbox). You can subscribe to various folders on the IMAP4 server. E-mails are retrieved only from the subscribed folders.

If you delete e-mails on the phone they are deleted on the server automatically.

### E-mail options

While in the inbox you have the following options: **View**, **Retrieve e-mail**, **Retrieve all accts**, **Account settings**, **Reply/Reply to all**, **Forward**, **Add to Contacts**. For POP3 accounts: **Delete on server**. For IMAP4 accounts: **Subscr. to folders**, **Move to folder**, **Unsubscribe** and **sort display order**.

While reading a message you have the following options: **Voice call/Video call**, **Go to URL**, **View/Download**, **Delete on phone**, **Go to URL**, **Save as bookmark**.

## Add to Contacts

You can add contacts received via SMS, MMS or e-mail. You can add the contact details of the sender, contact details included in the message and vCards.

### Save sender/contact details

Contact details included in a message are displayed in the **highlighted** text.

#### Options

Open menu and select **Add to Contacts**.

You can either add the information to an existing contact or create a new contact.

### Save vCard

#### Options

Open menu and select **Save contact**.

## WAP push

Service Indication (SI), audio/ video/ image/text and service loading are displayed.

### Service loading message

Depending on your setting, you are connected to the browser and the service is loaded automatically.

### DM request

If the pushed operation causes initial configuration of the handset and provisioning of application settings, the device manager is started (page 46).

## Message lists

Messages are displayed the same as in the inbox (page 33).

## Drafts

 →  → Drafts

The list is organised on two tabs: SMS/MMS and e-mail.

You can save a message as a draft while creating it. Messages are saved as drafts automatically if transmission fails, or if you start another application while creating a message (e.g. you accept an incoming call).

## Sent messages

 →  → Sent messages

The list contains all sent messages and is organised on two tabs: SMS/MMS and e-mail.

E-mails are not sorted by configured accounts and not synchronised with the server.

# Message settings

You can configure SMS, MMS, e-mails, cell broadcast (CB), voice mail and instant messages.

## SMS settings

 →  → Message settings  
→ SMS → Select function.

### SMS profiles

The SMS parameters are configured in up to 5 different profiles.

### Auto header

The Header template is automatically inserted at the start of the SMS.

### Auto signature

The Signature template is automatically inserted at the end of the SMS.

### Autosave sent

All sent SMS messages are saved automatically in the Sent folder (page 35).

### Auto SMS delete

The oldest SMS message in the Inbox will be deleted upon arrival of a new SMS message.

### Emoticons

Emoticons are automatically displayed as little pictures.

### Text size

You can set the displayed size of the text in the SMS Viewer.

# MMS settings

 →  → Message settings  
→ MMS → Select function.

### MMS profiles

The MMS parameters are configured in up to 5 different profiles. You will receive the necessary data from your service provider or via the "Setting Configurator" at [www.siemens.com/mobilephonescustomer-care](http://www.siemens.com/mobilephonescustomer-care).

### Home retrieval/Roaming retrieval

You can configure when the MMS messages are to be downloaded from the message server for Home and Roaming retrieval.

### Creation mode

You can restrict the content that can be added to an MMS.

### Req. read report

If the function is activated a report is sent back when the recipient reads MMS message for the first time.

### Req. deliv report

If the function is activated a report is sent back when the recipient has downloaded the MMS message.

### Delivery time

Select how long MMS should be held on the server before sending it to recipient.

### Validity period

If an MMS message could not be delivered during this period, it is deleted from the server automatically.

### Hide number

If the function is activated your number is withheld from recipient.

### Anon. messages

If set to **Reject**, anonymous MMS messages are rejected automatically.

### Allow read report



If the function is activated requested read reports are enabled.

### Allow deliv report

If the function is activated requested delivery reports are enabled.

### Auto signature

See SMS settings page 36.

### Autosave sent

See SMS settings page 36.

### Allow adverts

If the function is deactivated MMS-based advertisements are automatically rejected.

### Max msg size

The size restriction affects downloaded and created MMS messages.

## E-mail settings



→ Message settings



→ E-mail → Select function.

Before using this service you must set the server access and your e-mail parameters. You will receive the necessary data from the service provider or via the "Setting Configurator" at [www.siemens.com/mobilephonescustomer-care](http://www.siemens.com/mobilephonescustomer-care).

The e-mail parameters are configured in up to 5 different accounts.

## CB settings



→ Message settings



→ Cell broadcast



→ Select function.

Activate/deactivate the CB service and display the local cell information in standby mode. Configure up to 10 types of broadcast messages you want to receive.

## Voice mail



Most service providers supply you with a mailbox in which a caller can leave a voice mail for you if

- your phone is switched off or not ready to receive,
- you do not want to answer,
- you are making a phone call (and if **Call waiting** page 44 is not activated).

If the voice mail service is not part of your service provider's standard package, you will need to register for it, and possibly set the voice mail manually. The following sequence may vary from service provider to service provider.

## Settings

 →  → Voicemail

If number is not yet entered:


**Yes** Confirm request to open input field.

Or open editor via main menu:

 →  → Message settings  
→ Voicemail

## Voice mail no.:



Enter number and confirm with .

## Notification

You can activate and deactivate display of a message notifying of new voice mail entries.


## Internet

 →  → Select function.


Get the latest information from the Internet that is specifically adapted to the display options of your phone.

The browser is activated with the preset option as soon as you call up the function. Settings may be specified/pre-assigned by the service provider.


## Ending a connection


 Press to end the connection and close the browser.

## Navigation in the browser

-  • Select a link.  
• Settings, status on/off.

**Back** Press to go back a page.

-  • One input field/link forward/back.  
• Scroll one line.

 Tab through active content (left on page).

## Entering special characters

 / 

Select special characters.

## Enter URL



Enter URL.


**Options** Open menu and select **Go**.

Start the browser and display the entered Internet site.

## Bookmarks list

Display the list of bookmarks stored in the phone.



Select the bookmark and confirm with  to call up URL.

## History

Display the list of most recently visited Internet sites.



Select the history entry.



Call up the URL.

For standard functions see page 14.

## Browser settings

Set the multimedia behaviour, look and feel, security issues and WAP push for the browser to suit your requirements. You can configure and select up to 5 browser profiles.

## Download

Downloads are offered on the Internet. Once downloaded, these are available to you via the phone.

There are three categories of downloads:

- Web browsing.
- Open Mobile Alliance (OMA): Download of the media content that has associated digital rights.
- Download of Java applications: Java applications are decrypted and processed by the Java Application Manager (JAM).

You can use the browser to download applications (e.g. ringtones, games, pictures, animations) from the Internet.

Siemens excludes all warranty and liability claims in respect of or in connection with any applications subsequently installed by the customer and any software not included in the original delivery package. This also applies to functions enabled subsequently at the customer's instigation. The purchaser bears sole risk for the loss of, damage to, and any defects arising in, this device or the applications and for any direct damage or consequential damage of whatever nature resulting from the use of this application. For technical reasons, such applications and subsequent enabling of certain functions are lost in the event of the device being replaced/re-supplied and may be lost if it is repaired. In such cases, the buyer is required to download or enable the application again. Please ensure that your phone has Digital Rights Management (DRM) so that downloaded applications are protected from unauthorised reproduction. These applications are then exclusively intended for your phone and cannot be transferred from this even to create a backup. Siemens offers no warranty or guarantee nor does it accept any liability for the customer's ability to download or enable applications again or to do so free of charge. We recommend that you carry out a backup from time to time of the applications on your Windows® PC using the "Mobile Phone Manager" ([www.siemens.com/sxg75](http://www.siemens.com/sxg75)).



Your Internet browser is under license of:



## Games



Games are offered on the Internet. You can download games on the phone. Once downloaded, these are available to you via the phone.

Some games are already pre-installed on your phone. You will find these listed here:

[www.siemens.com/sxg75](http://www.siemens.com/sxg75)

## Settings

### Profiles



Several settings can be stored in a phone profile, for example to adapt the phone to the surrounding level of noise.

- Bluetooth Car Kits do not support profiles, e.g. General, Silent, Meeting, Outdoor, Car kit, Headset.
- If you change settings when not in the profile menu, changes are not saved in the current selected profile.



Select a default profile or a personal profile.



Activate profile.

Edit a default profile or create a new personal profile:



Select profile.



Open menu and select **Change settings**.

The list of available settings is displayed. For details see corresponding menu descriptions.

### Headset

Profile is automatically set if an original Siemens headset is attached.

## Ringtones



Set the tones on the telephone to suit your requirements. The volume setting controls the volume of the ringtone as well as the general volume level of beeps and tones played by different applications. Activate/deactivate the ringtone for different functions or reduce it to a short beep.


## Themes



Load a completely new user interface in your phone. With the press of a key, various functions are re-organised based on a theme.

Theme files are compressed to save memory space. After a download (page 39) or a call from **My stuff** (page 53), these are automatically unzipped when activated.



Select theme and confirm with .

If you delete an active theme, some used elements are reset to default.

## Display



 → Display

### Pictures/animations

You can set pictures/animations separately for the following functions:

- Wallpaper: Background image used on standby display.
- Logo: Graphic to be displayed instead of the provider logo.
- Startup animation: Animation displayed when phone is switched on.
- Shutdown anim.: Animation displayed when phone is switched off.

### Screensaver

Picture displayed if a time period you set has elapsed. An incoming call and pressing any key will end the function unless the safety function is activated.

When the screensaver is manually set,

- the talk/standby time is reduced dramatically
- the screensaver can cause irreversible display burn-in effects.

### Greeting message

Set message to be displayed instead of animation when phone is switched on.

### Backlight time

Set backlight duration for display.

### Brightness

Set brightness level for the display.

### Power save

Set time when the display goes into power save mode.

## Vibration (silent alert)



→ Vibration

To avoid the disturbance caused by a ringing phone, you can activate the silent alert function as an alternative. The silent alert can also be activated in addition to the ringtone.

## Connectivity



### IrDA

Your phone has an infrared interface. The distance between the two devices must not exceed 30 cm. The infrared windows in both appliances must be aligned as accurately as possible with each other.

#### IrDA active

Activate/deactivate the infrared interface.

#### File location

Select where the files are to be stored after being transferred via IrDA.

### Bluetooth® (BT)

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Siemens are under license. Other trademarks and trade names are those of their respective owners. Bluetooth QDID (Qualified Design ID): B02421

Bluetooth is a short-range radio connection by means of which a headset or car kit or such can be connected without the need for wires.

Each Bluetooth device has its own specific address and can be given a self-explanatory name as an option. Password protection ensures the security of a Bluetooth connection, as does including the BT partner in a list of "confidential" devices.

If Bluetooth is activated, IrDA (Infrared) is deactivated and vice versa.

#### Bluetooth active

Activate/deactivate Bluetooth.

#### File location

Select where the files are to be stored after being transferred via Bluetooth.

#### Search

Search for specific categories of devices or for all Bluetooth devices.

Found devices are displayed in a list (for list options see below).

#### Known devices

View the list of known devices (list options see below).

#### Last connected

View the list of last 10 connected devices, including those that are currently connected (list options see below).

#### My BT name

Display your device information. Enter **Device name**: This is the name the partner sees. If you give no name, the phone uses the non-changeable device address.

#### Bluetooth visibility

The device address or the **My BT name** of your phone is shown or not shown to other BT devices when they request this in order to receive or send data.

## GPRS



(General Packet Radio Service)

GPRS is a new method for transmitting data faster in the mobile network.

## Data counter

Display the data transfer information for GPRS and UMTS.

## Connect'n profiles



Depending on your provider up to 25 profiles are preset containing a collection of settings utilised by applications.

## Internet profiles



Depending on your provider up to 25 profiles are preset containing a collection of settings utilised by applications.

## Linger time



Depending on your provider you can specify the linger time which will apply to all applications.


## Shortcuts

You can assign one important number or one important function to each one of the two softkeys, the navigation key and number keys 2 to 9 (speed-dial numbers).



 →  → Shortcuts

### Select key



#### Left soft key/Right soft key

Select key and confirm with .

#### Navigation key


Select and confirm with . Select **Up/Down/Left/Right** and confirm with .

#### Number keys

Select and confirm with . Select number key and confirm with .

### Set function



Select function and confirm with .

### Start function/call number

Press and **hold** key to start application/dial number.

### Pre-defined key functions

The following key functions are pre-defined and cannot be changed.



Open Contacts (page 25).



Select the mailbox number (page 38).



Switch between two connections during a call (page 48).

The service provider may have already assigned functions to a softkey (e.g access to "SIM services" or direct call-up of the Internet portal). It may not be possible to modify this key assignment.

## Call setup

 →  → Call setup  
→ Select function.

### Hide ID

When you make a call, your number can be shown on the display of the called party. The settings you make here apply to voice and video calls.

### Call waiting


If you are registered for this service, activate/deactivate call waiting.

## Diverts


You can specify the conditions under which the call types should be diverted to your mailbox or other numbers.

### Divert video calls/voice calls

#### Voice calls/Video calls

Select a call type and confirm with .



Select option and confirm with .

#### Options


Open menu and select **Set**.



Enter a number/select contact for divert.

## Divert other call types

### All calls/Data/Fax/Messages

Select a call type and confirm with .

#### Options

Open menu and select **Set**.



Enter a number/select contact for divert.

### All calls

All calls are diverted.



Symbol in the top line of the display in standby mode.

### Unanswered

A call is diverted in the following situations: **Not reachable**, **No reply**, **Busy** (see below).

### Not reachable

A call is diverted if the phone is switched off or is out of range.

### No reply

A call is only diverted after a delay that is determined by the network.

### Busy

A call is diverted if another call is in progress. If you activated **Call waiting** (page 44), you will hear the call waiting tone during a call (page 22).

### Fax


Fax calls are diverted to a number with a fax connection.

## Data/Messages



Data calls are diverted to a number with a PC connection.

## Any key answer

Incoming calls can be accepted by pressing any key (except for ) .

## Auto volume

Set automatic gain control (AGC) and automatic volume control (AVC). This feature automatically controls earpiece volume and microphone sensitivity depending on ambient noise level.

## Video calls

Specify the additional settings for video calls.

### Show my image

Your video is always transmitted to the caller during a video call.

Otherwise you can choose whether or not to send the video when you receive a incoming video call.

### Select image

When you do not want to transmit your video image to the caller (**Show my image** is deactivated) you can select a video mute picture that is shown instead.

You cannot send protected files during a video call (DRM, page 13).

## Phone




Phone

→ Select function.

## Language

Set current language.

- Display language: Show the currently set display language.
- Input language: Select a language for text entry. Languages with T9 support are marked with the T9 symbol.

The phone can be reset to the language of your home service provider with the following input (in standby mode): **\*#0000#** .

## T9 mode

Set T9 (intelligent text entry) or the multi-tap as default text entry method for most of the text entry items.


## Key tones

Set the tone that is played when pressing keys. Possible settings are **Tone**, **Silent**.

## Info tones

Set the service and alarm tones.

## Voice dialling

If this function is enabled, you can activate voice dialling, if you press  key.

## File system

### Format card

Format the **RS MultiMediaCard** and delete **all** saved data. Formatting can last longer than one minute.

### Eject card

Eject the **RS MultiMediaCard** from phone safely without losing data that is still being transmitted to card.

### Memory assistant

Start the memory assistant (page 15).

## Phone identity

The phone identity number (IMEI) is displayed. This information may be useful for customer service.

### Device check

After the last information page, a self-test as well as the individual test are offered. If you select **Self test**, all individual tests are carried out.

To display the software version for your phone in standby mode: **\*#06#**, and select the Configuration tab.



## Device manager (DM)

Start DM session. With the device manager, configuration files are transmitted from your provider. Sessions can also be initiated via WAP push or as automatic software updates each time the phone is switched on.

### Master reset

Reset the phone to default values (factory setting). This does not affect the SIM card or the network settings.

Alternatively enter in standby mode:

**\*#9999#** . Enter phone code (page 16) and confirm with .




## Clock

 →  → Clock

The clock must be set correctly once at start-up (page 12).

### Setting the time and date

**Time/Date** Select and confirm with .

 /  Enter the time (hours/minutes) or date (day/month/year) and confirm with .

The time and date you entered are only used if the **Auto time** (page 47) is deactivate. Otherwise the network time is used and displayed.

## Time zone

The world clock shows the current system time above the map.

The time zone can be changed:



Select desired setting and change the time zone in the world map.



Select a city in the selected time zone.



Display set time zone.

If you changed the time zone:

- Alarm clock is changed to the current time zone.
- Calendar events are not affected by time zone changes.

## Time format

Set the display format for time used in various applications.

## Date format

Set the display format for date.

## Show clock

Set the time and date display in standby mode.

## Auto time

If you activate this setting, the time zone is switched automatically to local time by network.



## Security



→ Security



→ Select function.

## Auto key lock

If activated, the keypad is locked automatically if no key has been pressed for one minute in standby mode. However, you can still be called and you can still make an emergency call.

The keypad can also be directly locked and unlocked in standby mode. In each case:



Press and **hold**.

## Only

(PIN 2 or phone code-protected)

Dialling options are restricted to the SIM protected numbers in the contacts.

## PIN codes

Description on page 16: **PIN control, Change PIN, Change PIN2, Change phonecode.**

## This SIM only

(PIN 2 or phone-code protected)

The phone can be connected to a SIM card when the phone code is entered.





## Barrings



Barring restricts the use of your SIM card (not supported by all service providers).

- **All outgoing:** All outgoing calls except emergency numbers are barred.
- **Outg. internat.:** Only national calls can be made.
- **Outg. int. x home:** International calls are not permitted. However you can make calls to your home country when abroad.
- **All incoming:** Phone is barred for incoming calls.
- **When roaming:** You do not receive calls when you are outside your home network.

## Content downl'd ?

Enable or disable a content download notification (page 13).

## Content expiry

Enable/disable warning message when a license is about to expire (page 13).

## Network



→ Network

→ Select function.

### Select line



This function is only displayed if it is supported by the service provider.

**Two separate** numbers must be registered on the phone.

### Network info

Retrieve information about the network operator currently set.

### Choose network

Start network search. This is useful if you are **not** in your home network or want to register in a **different** network.

### Auto network

The phone searches automatically and selects the next network on the preferred network list.

### Preferred network

Display a list of preferred networks. Customise the list by changing entries to the desired networks.

### Mode selection



Select the band in which the phone operates.

Make sure that your service provider supports the selected mode.

### Fast search

Phone searches for a network faster.

## Accessories



### Headset

If an original Siemens headset is used the **Headset** profile is automatically activated when the headset is plugged in.

### Charge via USB

Phone is charged via USB when connected to a computer via USB cable.

## Organiser



## Calendar

You can enter events in the calendar. Time and date must be set for the calendar to work correctly.

The calendar offers you 3 views: daily, weekly and monthly views. When you switch the view, the current hour/day/week is marked.

### New event/Edit event

**Options** Open menu and select **New event/Edit event**.

Enter start date and time and end date and time. Alarm/repeat can be set for each event.

When the set date and time of the event are reached there is an audio and a visual alarm.

An alarm sounds even when the phone is switched off.

## Dictat. machine

To start/playback recording see sound recorder (page 51).

## Time zones

The time zone can be selected in the world map or city list (page 47).



## Remote sync

Synchronise externally filed data with the data on your phone.

Before you start the synchronisation, check **Active profile**, **Sync mode** and **Apps to synchronise**.

You can configure up to 5 profiles with a different provider, URL, port and contact/calendar database.

## Extras


 →  → Select function.

## My menu

Create your own menu with frequently used functions, phone numbers from the contact list or applications. A list of 10 entries is preset. You can, however, change it as you wish.

## SIM toolkit (optional)


Your service provider may offer special applications such as mobile banking, share prices, etc. via the SIM card.

 Symbol for SIM services.


For further information, please contact your service provider.

## Alarm clock

The alarm clock can be set for each day of the week separately. The alarm will ring at the set time, even when the ringtone or the phone is switched off. Press any key to end alarm.

 Select day of the week.

**Options** Open menu and select Set alarm.

 Set time (hh:mm).

**Options** Open menu and select Save.

**Apply every day**



**Options** Open menu and select Apply every day.

## FM radio

To use the radio function, the stereo headset must be connected to the phone.

You can either select a frequency, scan for radio stations or select a radio station from the preset list.

**Selecting frequency or scanning**

 /  Press **briefly**: Go up/down one frequency.

Press and **hold**: Start scan mode.

**Selecting from preset list**

 0 + -  wxyz 9

Press **briefly**: Select radio station.

Press and **hold**: Add the current radio station to the preset list.

## Calculator

The input line and two calculation lines are located in the top display half.



Enter digit(s).



Navigate to functions.



Select function.



Enter digit(s).



Use function. The result is calculated and displayed

## Unit converter

You can convert various amounts into other units.



Select the source unit/currency.



Switch to the input field.



Enter the quantity to be converted.



Switch to the selection field.



Select the target amount. The result is displayed.

You can use both input fields alternately.



Opens the calculator with the current converted value.

## Currency

Enter a basic currency into which the conversions are to be made.

## Sound recorder

### Record new

Select.

If the RS MultiMediaCard is inserted (page 9), select save location:

### Phone memory/Card

Select default save location and confirm with



Record/pause alternately.

### Done

End recording.

For playback see media player (page 51).

## Stopwatch

Use the stopwatch to measure time or to save intermediate times.



Start/Stop/Restart.



Switch to lap mode. In lap mode: Save lap time.

After a stop:



Reset time to zero.

## Media player

When you are viewing a picture/video or listening to a melody, the application starts the media player automatically. Starting via the main menu:



The media player functions are accessible via 4 tabs: **Music**, **Pictures**, **Videos** and **Bookmarks**.



Select tab.

The media player contains files stored in the phone memory as well as files stored on the **RS MultiMediaCard**.

## Music

The music tab includes, for example, MP3 and AAC files located on the phone and MultitMediaCard.



Select track/playlist and confirm with

The media player offers the following functions for music playback:




Playback/Pause depending on current state.



Press **briefly**: Skip to previous/next track.

Press and **hold**: Rewind/fast forward within the current track.



Press **briefly**: Raise/decrease volume by one level.

Press and **hold**: Raise/decrease volume to maximum/minimum.

## Pictures

All files are listed with thumbnail, file name and size.



Select file and confirm with .

The following functions can be applied to a displayed picture:



Skip to previous/next picture in the directory.

## Zoom picture

### Options

Open menu and select zoom mode **Zoom in/Zoom out/Fit to screen**.

## Videos

The media player offers the following functions for video playback:




Playback/Pause depending on current state.



(only local playback, not video streaming)

Press **briefly**: Rewind/Fast forward if supported.

Press and **hold**: Go to next/previous key frame.



Press **briefly**: Raise/decrease volume by one level.

Press and **hold**: Set volume to maximum/minimum.

## Bookmarks

Play music/video directly from bookmark. The Bookmarks tab shows a listing of all streaming content links on the phone and **RS MultiMediaCard**.

## My stuff

To organise your files, you can use the file system like a PC file manager. There are some folders in **My stuff** for various data types for this purpose. If, for example, you want to download new pictures or sounds, the download function is contained in the relevant folder.

Remember that pictures and sounds may be protected (DRM, page 13).

You can open **My stuff** either from other applications, e.g. media player, messages, settings or via main menu:




If **RS MultiMediaCard** is inserted (page 9), folders/files are organised on a separate tab. Files are managed the same way as files saved on the phone.



Select tab (phone memory/**RS MultiMediaCard**). List of folders/files is displayed.



Select folder/file or link and confirm with .

**Back**

Go back to previous folder level.

Depending on your selection, file and respective application are opened, or download is started.

## Index structure

Folder	Content/Options	Formats (e.g.)
Sounds	Melodies, records	mp3, aac+, m3u, mid, amr, wav
Pictures	Pictures	bmp, jpg, jpeg, png, gif
Videos	Videos	3gp
Themes	Load theme (packed)	*
Games	Launch Java Application Manager and display list of downloaded applications.	jar, jad
Appl.		*
Misc.	Files of media types that are not included in other folders, e.g. text modules, Internet pages.	html, wml

# Mobile Phone Manager

MPM (Mobile Phone Manager) enables you to use extended phone functions from your PC. The phone and PC communicate via IrDA, Bluetooth or a data cable. MPM offers you a multitude of functions:

You can manage your address and contact data and synchronise it with other phones (including Gigaset).

MPM allows easy management of your music and sound files, play lists, ringtones and videos. With a mouse click you can transfer the contents of a whole music CD to your phone as space saving AAC or MP3 files in top quality.

With the Mobile Modem Assistant you can use your phone as a modem at home and abroad with ease. You can gather your WAP favourites and move them to your phone conveniently.

Of course your phone's data and settings can also be backed up on your PC. With Phone Explorer you can access your phone's files as if it was just another folder on your PC.

If you like, the software will do your routine work for you like synchronising your contacts, downloading your newly taken photos, or updating your music files.

MPM and a detailed manual and online help can be found on the CD included with this phone. You can download future versions of this software from the Internet at:

**[www.siemens.com/sxg75](http://www.siemens.com/sxg75)**

# Customer Care

We offer fast, individual advice! You have several options:

Our online support on the Internet:

**[www.siemens.com/  
mobilephonescustomercare](http://www.siemens.com/mobilephonescustomercare)**

We can be reached any time, any place. You are given 24 hour support on all aspects of our products. Here you will find an interactive fault-finding system, a compilation of the most frequently asked questions and answers, plus user guides and current software updates to download.

When calling customer service, please have ready your receipt and the phone identity number (IMEI, to display press \*#06#), the software version (to display, press \*#06#, then select according to tab) and if available, your Siemens Service customer number.

You can also get personal advice about our range of products on our Premium Hotline: **United Kingdom** ..... **0906 9597500** (0.75 £ per minute)

Qualified Siemens employees are waiting to offer you expert information about our products and installation.

In some countries repair and replace services are impossible where the products are not sold through our authorised dealers.

If repair work is necessary, please contact one of our service centres:

Abu Dhabi .....	0 26 42 38 00
Argentina .....	0 80 08 88 98 78
Australia .....	13 00 66 53 66
Austria .....	05 17 07 50 04
Bahrain .....	40 42 34
Bangladesh .....	0 17 52 74 47
Belgium .....	0 78 15 22 21

Bolivia .....	0 21 21 41 14
Bosnia Herzegovina .....	0 33 27 66 49
Brunei .....	02 43 08 01
Bulgaria .....	02 73 94 88
Cambodia .....	12 80 05 00
Canada .....	1 88 87 77 02 11
Chile .....	8 00 53 06 62
China .....	0 21 23 01 71 88
Colombia .....	01 80 07 00 66 24
Croatia .....	0 16 10 53 81
Czech Republic .....	2 33 03 27 27
Denmark .....	35 25 86 00
Dubai .....	0 43 96 64 33
Ecuador .....	18 00 10 10 00
Egypt .....	0 23 33 41 11
Estonia .....	6 30 47 97
Finland .....	09 22 94 37 00
France .....	01 56 38 42 00
Germany .....	0 18 05 33 32 26
Greece .....	80 11 11 11 16
Hong Kong .....	28 61 11 18
Hungary .....	06 14 71 24 44
Iceland .....	5 11 30 00
India .....	22 24 98 70 00 Extn: 70 40
Indonesia .....	0 21 46 82 60 81
Ireland .....	18 50 77 72 77
Italy .....	02 24 36 44 00
Ivory Coast .....	05 02 02 59
Jordan .....	0 64 39 86 42
Kenya .....	2 72 37 17
Kuwait .....	2 45 41 78
Latvia .....	7 50 11 18
Lebanon .....	01 44 30 43
Libya .....	02 13 50 28 82
Lithuania .....	8 70 07 07 00
Luxembourg .....	43 84 33 99
Macedonia .....	02 13 14 84
Malaysia .....	+ 6 03 77 12 43 04
Malta .....	+ 35 32 14 94 06 32
Mauritius .....	2 11 62 13
Mexico .....	01 80 07 11 00 03
Morocco .....	22 66 92 09
Netherlands .....	0 90 03 33 31 00
New Zealand .....	08 00 27 43 63
Nigeria .....	0 14 50 05 00



Norway.....	22 70 84 00
Oman.....	79 10 12
Pakistan.....	02 15 66 22 00
Paraguay.....	8 00 10 20 04
Peru.....	0 80 05 24 00
Philippines.....	0 27 57 11 18
Poland.....	08 01 30 00 30
Portugal.....	8 08 20 15 21
Qatar.....	04 32 20 10
Romania.....	02 12 09 99 66
Russia.....	8 80 02 00 10 10
Saudi Arabia.....	0 22 26 00 43
Serbia.....	01 13 07 00 80
Singapore.....	62 27 11 18
Slovak Republic.....	02 59 68 22 66
Slovenia.....	0 14 74 63 36
South Africa.....	08 60 10 11 57
Spain.....	9 02 11 50 61
Sweden.....	0 87 50 99 11
Switzerland.....	08 48 21 20 00
Taiwan.....	02 23 96 10 06
Thailand.....	0 27 22 11 18
Tunisia.....	71 86 19 02
Turkey.....	0 21 64 59 98 98
Ukraine.....	8 80 05 01 00 00
United Arab Emirates.....	0 43 66 03 86
United Kingdom.....	0 87 05 33 44 11
USA.....	1 88 87 77 02 11
Venezuela.....	0 80 01 00 56 66
Vietnam.....	84 89 20 24 64
Zimbabwe.....	04 36 94 24

# Care and maintenance

Your phone has been designed and manufactured to the highest of standards and should be treated with great care. The suggestions below will help you to enjoy your phone for many years.

- Protect your phone from moisture and humidity. Precipitation, humidity and liquids contain minerals that will corrode electronic circuits. Nevertheless, should your phone become wet, disconnect it immediately from the power supply to avoid electric shock. Do not place your phone (even to dry it) on/in a source of heat such as a microwave oven, oven or radiator. The phone may become overheated and possibly explode.
- Do not use or store the phone in dusty, dirty areas. Its moving parts may be damaged and the casing may become deformed and discoloured.
- Do not store your phone in hot environments (e.g. vehicle instrument panel in the summer). High temperatures can shorten the life of electronic devices, damage batteries and warp or melt certain plastics.
- Do not store your phone in cold environments. When the phone warms up again (to its normal ambient temperature), moisture can form inside the phone, which may damage electronic circuit boards.
- Do not drop, knock or shake your phone. Rough handling can damage internal circuit boards!
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the phone!

The suggestions given above apply equally to your phone, battery, charger and all accessories. If any of these parts is not working properly, obtain fast and reliable help at our service centres.

## Battery quality declaration

The capacity of your mobile phone battery is reduced each time you charge/discharge it. Storing the battery at temperatures that are too high or too low also causes a gradual loss of capacity. This can significantly reduce the operating times of your mobile phone, even after it has been fully charged.

The battery is, however, designed to be capable of being charged and discharged for a period of six months from when the mobile phone was purchased. Following this six-month period, we recommend replacing your battery if you experience a significant drop in performance. Only purchase original Siemens batteries.

## Display quality declaration

For technological reasons, a few small dots with different colours may appear in the display in exceptional cases.

Please note that the appearance of brighter or darker dots generally does not mean that a fault has occurred.

# Product data

## Declaration of conformity

BenQ Mobile hereby declares that the phone described in this user guide is in compliance with the essential requirements and other relevant provisions of European Directive 1999/5/EC (R&TTE). The relevant declaration of conformity (DoC) has been signed. Please call the company hotline if you require a copy of the original:  
[www.siemens.com/mobiledocs](http://www.siemens.com/mobiledocs)

CE 0168

## Technical data

UMTS class:	3 (0.25 watt)
Frequency range:	2 100 MHz
GSM class:	4 (2 watt)
Frequency range:	880–960 MHz
GSM class:	1 (1 watt)
Frequency range:	1 710–1 880 MHz
GSM class:	1 (1 watt)
Frequency range:	1 850–1 990 MHz
Weight:	134 g
Size:	111 × 53 × 20 mm (108 ccm)
Li-Ion battery:	1 000 mAh
Operating temperature:	–10 °C ... 55 °C
SIM card:	3.0/1.8 V
RS MultiMediaCard:	max. 256 MB

### Phone ID

You will need the following details if you lose your phone or SIM card:  
 the number of the SIM card (on the card):

.....  
 15 digit serial number of the phone  
 (under the battery):

.....  
 the customer service number of the service  
 provider:

### Lost phone

If you lose your phone or SIM card contact your service provider immediately to prevent misuse.

## Operating time

The operating time depends upon the respective conditions of use: Extreme temperatures considerably reduce the phone's standby time. Avoid placing the phone in the sun or on a heater.

### Call time (standard battery)

- UMTS: up to 300 minutes
- GSM: up to 360 minutes

### Standby time (standard battery)

Up to 400 hours

Action taken	Time (min)	Reduction of standby time by
Calling	1	30–90 minutes
Light *	1	50 minutes
Network search	1	15 minutes

\* Key input, games, organizer etc.

# SAR

## European Union (RTTE) and international (ICNIRP)

INFORMATION ON RF EXPOSURE / SPECIFIC ABSORPTION RATE (SAR)

THIS MODEL MEETS INTERNATIONAL GUIDELINES FOR EXPOSURE TO RADIO WAVES

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2 W/kg and was adopted into the European Standard EN 50360 and into other national standards. The CE mark demonstrates that the EU requirements are met.

The highest SAR value for this device when tested at the ear was **0.61 W/kg<sup>1</sup>**. As mobile devices offer a range of functions, they can be used in positions other than the head, such as directly on the body. In this case, the limits are met too.

As SAR is measured utilizing the device's highest transmitting power, the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum level required to reach the network.

The World Health Organization has stated that present scientific information does not indicate the need for any special precautions for the use of mobile devices. They note that if you nevertheless want to reduce your exposure then you can do so by limiting the length of calls or using a 'hands-free' device to keep the mobile phone away from the head and body.

Additional Information can be found on the websites of the World Health Organization ([www.who.int/emf](http://www.who.int/emf)) or Siemens ([www.siemens.com/mobilephones](http://www.siemens.com/mobilephones)).

1 The tests are carried out in accordance with international guidelines for testing.

## Guarantee certificate (UK)

Without prejudice to any claim the user (customer) may have in relation to the dealer or retailer, the customer shall be granted a manufacturer's Guarantee under the conditions set out below:

- In the case of new devices and their components exhibiting defects resulting from manufacturing and/or material faults within 24 months of purchase, Siemens shall, at its own option and free of charge, either replace the device with another device reflecting the current state of the art, or repair the said device. In respect of parts subject to wear and tear (including but not limited to, batteries, keypads, casings, small parts on casings, protective coverings where included in the scope of delivery), this warranty shall be valid for six months from the date of purchase.
- This Guarantee shall be invalid if the device defect is attributable to improper treatment and/or failure to comply with information contained in the user manuals.
- This Guarantee shall not apply to or extend to services performed by the authorised dealer or the customer themselves (e.g. installation, configuration, software downloads). User manuals and any software supplied on a separate data medium shall be excluded from the Guarantee.
- The purchase receipt, together with the date of purchase, shall be required as evidence for invoking the Guarantee. Claims under the Guarantee must be submitted within two months of the Guarantee default becoming evident.
- Ownership of devices or components replaced by and returned to Siemens shall vest in Siemens.
- This Guarantee shall apply to new devices purchased in the European Union. For

Products sold in the United Kingdom the Guarantee is issued by Siemens plc, Siemens House, Oldbury, Bracknell, Berkshire, RG12 8FZ.

- Any other claims resulting out of or in connection with the device shall be excluded from this Guarantee. Nothing in this Guarantee shall attempt to limit or exclude a Customers Statutory Rights, nor the manufacturer's liability for death or personal injury resulting from its negligence.
- The duration of the Guarantee shall not be extended by services rendered under the terms of the Guarantee.
- Insofar as no Guarantee default exists, Siemens reserves the right to charge the customer for replacement or repair.
- The above provisions does not imply a change in the burden of proof to the detriment of the customer.

To invoke this Guarantee, please contact our online support on the Internet [www.siemens.com/mobilephonescustomercare](http://www.siemens.com/mobilephonescustomercare) or the Siemens telephone service. The relevant number is to be found in the accompanying user guide.

## Guarantee certificate (IRL)

Without prejudice to any claim the user (customer) may have in relation to the dealer or retailer, the customer shall be granted a manufacturer's Guarantee under the conditions set out below:

- In the case of new devices and their components exhibiting defects resulting from manufacturing and/or material faults within 24 months of purchase, Siemens shall, at its own option and free of charge, either replace the device with another device reflecting the current state of the art, or repair the said device. In respect of parts subject to wear and tear (including but not limited to, batteries, keypads, casings, small parts on casings, protective coverings where included in the scope of delivery), this warranty shall be valid for six months from the date of purchase.
  - This Guarantee shall be invalid if the device defect is attributable to improper care or use and/or failure to comply with information contained in the user manuals.
  - In particular claims under the Guarantee cannot be made if:
    - The device is opened (this is classed as third party intervention)
    - Repairs or other work done by persons not authorised by Siemens.
    - Components on the printed circuit board are manipulated
    - The software is manipulated
    - Defects or damage caused by dropping, breaking, lightning or ingress of moisture. This also applies if defects or damage was caused by mechanical, chemical, radio interference or thermal factors (e.g.: microwave, sauna etc.)
    - Devices fitted with accessories not authorised by Siemens
  - This Guarantee shall not apply to or extend to services performed by the authorised dealer or the customer themselves (e.g. installation, configuration, software downloads). User manuals and any software supplied on a separate data medium shall be excluded from the Guarantee.
  - The purchase receipt, together with the date of purchase, shall be required as evidence for invoking the Guarantee. Claims under the Guarantee must be submitted within two months of the Guarantee default becoming evident.
  - Ownership of devices or components replaced by and returned to Siemens shall vest in Siemens.
  - This Guarantee shall apply to new devices purchased in the European Union. For Products sold in the Republic of Ireland the Guarantee is issued by Siemens Ireland Limited, Ballymoss Road, Sandyford Industrial Estate, Dublin 18 - The Republic of Ireland.
  - Any other claims resulting out of or in connection with the device shall be excluded from this Guarantee. Nothing in this Guarantee shall attempt to limit or exclude a Customers Statutory Rights, nor the manufacturer's liability for death or personal injury resulting from its negligence.
  - The duration of the Guarantee shall not be extended by services rendered under the terms of the Guarantee.
  - Insofar as no Guarantee default exists, Siemens reserves the right to charge the customer for replacement or repair.
  - The above provisions does not imply a change in the burden of proof to the detriment of the customer.
- To invoke this Guarantee, please contact our online support on the Internet **[www.siemens.com/mobilephonescustomercare](http://www.siemens.com/mobilephonescustomercare)** or the Siemens telephone service. The relevant number is to be found in the accompanying user guide.

# License Agreement

This License Agreement ("Agreement") is between You and Siemens Aktiengesellschaft, Germany ("Siemens"). The Agreement authorizes You to use the Licensed Software, specified in Clause 1 below, which may be included in your phone, stored on a CD-ROM, sent to You by electronic mail or over the air, downloaded from Siemens Web pages or servers or from other sources under the terms and conditions set forth below.

Read this Agreement carefully before using your phone. By using your phone or installing, copying, and/or using the Licensed Software, You acknowledge that You have read and understood the Agreement and agree to be bound by all of the terms and conditions stated below. You further agree that if Siemens or any licensor of Siemens ("Licensor") is required to engage in any proceeding, legal or otherwise, to enforce their rights under this Agreement, Siemens and/or its Licensor shall be entitled to recover from You, in addition to any other sums due, reasonable attorney's fees, costs and disbursements. If You do not agree to all of the terms and conditions of this Agreement, do not install or use the Licensed Software. This Agreement governs any Updates, releases, revisions, or enhancements to the Licensed Software.

1. **LICENSED SOFTWARE.** As used in this Agreement, the term "Licensed Software" means collectively: all the software in Your phone, all of the contents of the disk(s), CD-ROM(s), electronic mail and its file attachments, or other media with which this Agreement is provided and includes any related Siemens or third party software and upgrades, modified versions, updates, additions and copies of the Licensed Software, if any, distributed over the air, downloaded

from Siemens Web pages or servers or from other sources.

2. **COPYRIGHT.** The Licensed Software and all related rights, without limitation including proprietary rights therein, are owned by Siemens, its Licensors or affiliates and are protected by international treaty provisions and all applicable national laws. This Agreement does not convey to You nor allow You to acquire any title or ownership interest in the Licensed Software or rights therein. The structure, organization, data and code of the Licensed Software are the valuable trade secrets and confidential information of Siemens, its Licensors or affiliates. You must reproduce and include the copyright notices with any permitted copies You make of the Licensed Software.

3. **LICENSE AND USE.** Siemens grants to You a non-exclusive, non-transferable end user right to install the Licensed Software or use the Licensed Software installed on the phone. The Licensed Software is licensed with the phone as a single integrated product and may be used with the phone only as set forth in these licensing terms.

4. **LIMITATIONS ON LICENSE.** You may not copy, distribute, or make derivative works of the Licensed Software except as follows:

(a) You may make one copy of the Licensed Software, excluding the documentation, as an archival backup copy of the original. Any other copies You make of the Licensed Software are in violation of this Agreement.

(b) You may not use, modify, or transfer the right to use the Licensed Software other than together with the accompanying hardware or copy the Licensed Software except as expressly provided in this Agreement.

- (c) You may not sublicense, rent or lease the Licensed Software.
- (d) You may not reverse engineer, decompile, modify, or disassemble those Licensed Software programs except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation.

Parts of the Licensed Software may be supplied by third parties and may be subject to separate license terms. Such terms are set out within the documentation.

5. MISUSE OF THE LICENSED SOFTWARE OR DATA GENERATED BY THE LICENSED SOFTWARE IS STRICTLY PROHIBITED BY SIEMENS, MAY VIOLATE GERMAN, U.S. AND OTHER LAWS AND MAY SUBJECT YOU TO SUBSTANTIAL LIABILITY. You are solely responsible for any misuse of the Licensed Software under this Agreement and for any liability or damage related in any way to your use of the Licensed Software in violation of this Agreement. You are also responsible for using the Licensed Software in accordance with the limitations of this Agreement.

6. TERMINATION. This Agreement is effective from the first date You install, copy or otherwise use the Licensed Software. You may terminate this license at any time by deleting or destroying the Licensed Software, all back up copies and all related materials provided to You by Siemens. Your license rights terminate automatically and immediately without notice if You fail to comply with any provision of this Agreement. The rights and obligations under sections 2, 5, 6, 7, 9, 12 and 13 of this Agreement shall survive the termination of this Agreement.

7. YOU ACKNOWLEDGE THE LICENSED SOFTWARE IS PROVIDED "AS IS" AND NEITHER SIEMENS NOR ANY OF ITS LICENSORS MAKE ANY REPRESENTATIONS OR WARRANTIES, EXPRESS

OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR THAT THE LICENSED SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS. THERE IS NO WARRANTY BY SIEMENS OR ITS LICENSORS OR BY ANY OTHER PARTY THAT THE FUNCTIONS CONTAINED IN THE LICENSED SOFTWARE WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE LICENSED SOFTWARE WILL BE UNINTERRUPTED OR ERROR-FREE AND SIEMENS AND ITS LICENSORS HEREBY DISCLAIM ANY AND ALL LIABILITY ON ACCOUNT THEREOF. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY A SIEMENS REPRESENTATIVE SHALL CREATE A WARRANTY OR IN ANY WAY AFFECT THIS DISCLAIMER. YOU ASSUME ALL RESPONSIBILITY TO ACHIEVE YOUR INTENDED RESULTS AND FOR THE INSTALLATION, USE, AND RESULTS OBTAINED FROM IT.

8. NO OTHER OBLIGATIONS. This Agreement creates no obligations on the part of Siemens other than as specifically set forth herein.

9. LIMITATION OF LIABILITY. IN NO EVENT SHALL SIEMENS, ITS EMPLOYEES, LICENSORS, AFFILIATES OR AGENTS BE LIABLE FOR ANY DIRECT DAMAGES, LOST PROFITS, DATA OR BUSINESS, OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, PROPERTY DAMAGE, INTERRUPTION OF BUSINESS OR FOR ANY SPECIAL, INDIRECT, INCIDENTAL, EXEMPLARY, ECONOMIC, PUNITIVE OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED, AND WHETHER ARISING UNDER CONTRACT, TORT, NEGLIGENCE,



OR OTHER THEORY OF LIABILITY, OR ARISING OUT OF THE USE OF OR INABILITY TO USE THE LICENSED SOFTWARE, EVEN IF SIEMENS IS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE LIMITATION OF LIABILITY SHALL NOT APPLY IF AND TO THE EXTENT SIEMENS' LIABILITY IS MANDATORY UNDER THE APPLICABLE LAW E.G. ACCORDING TO PRODUCT LIABILITY LAW OR IN THE EVENT OF INTENTIONAL MISCONDUCT, PERSONAL INJURY OR DEATH.

10. TECHNICAL SUPPORT. Siemens has and its Licensors have no obligation to furnish You with technical support unless separately agreed in writing between You and Siemens or the applicable Licensor.

Siemens and where applicable its Licensors in the Licensed Software shall be free to use any feedback received from You resulting from your access to and use of the Licensed Software for any purpose including (without limitation) the manufacture, marketing and maintenance or support of products and services.

11. EXPORT CONTROL. The Licensed Software may include technical data and cryptographic software and is subject to German, European Union and U.S. export controls and may be subject to import or export controls in other countries. You agree to strictly comply with all applicable import and export laws and regulations. Specifically, You agree, to the extent required by U.S. Export Administration Regulations, that You shall not disclose or otherwise export or re-export the Licensed Software or any part thereof delivered under this Agreement to (a) Cuba, Iran, Iraq, Libya, North Korea, Sudan, Syria or any other country (including a national or resident of such country) to which the U.S. has restricted or prohibited the export of goods or services.

12. APPLICABLE LAW AND FORUM. The laws of Germany govern this Agreement. No choice of law rules of any jurisdiction will apply. The courts in Munich shall settle any disputes arising out of or relating to this Agreement provided you are a merchant.

13. MISCELLANEOUS. This Agreement represents the entire agreement between You and Siemens relating to the Licensed Software and (i) supersedes all prior or contemporaneous oral or written communications, proposals, and representations with respect to its subject matter; and (ii) prevails over any conflicting or additional terms of any acknowledgement or similar communication between the parties during the term of this License. Notwithstanding the foregoing, some products of Siemens may require You to agree to additional terms through an online "click-wrap" license, and such terms shall supplement this Agreement. If any provision of this Agreement is held invalid, all other provisions shall remain valid unless such validity would frustrate the purpose of this Agreement, and this Agreement shall be enforced to the full extent allowable under applicable law. No modification to this Agreement is binding, unless in writing and signed by a duly authorized representative of each party. This Agreement shall be binding on and shall inure to the benefit of the heirs, successors, and assigns of the parties hereto. The failure of either party to enforce any right resulting from the breach of any provision of this Agreement by the other party will not be deemed a waiver of any right related to a subsequent breach of such provision or any other right hereunder. Notwithstanding anything to the contrary in this Agreement, Siemens and/or its licensors may enforce its rights, including but not limited to copyright, trademark or trade names, in accordance with the rules of law in each country.

# Index

- A**
- Accessories ..... 49
  - Alarm clock ..... 50
  - Answering service (external) ..... 38
  - Any key answer ..... 45
  - Auto key lock ..... 47
  - Auto time ..... 47
  - Auto volume ..... 45
- B**
- Band selection ..... 48
  - Barrings ..... 48
  - Battery
    - Charge ..... 9
    - Insert ..... 8
    - Operating time ..... 10, 58
    - Quality declaration ..... 57
  - Bluetooth® ..... 42
  - Bookmark
    - Media player ..... 53
    - WAP ..... 39
  - Brightness ..... 41
  - Browser ..... 38
- C**
- Calculator ..... 51
  - Calendar ..... 49
    - Alarm ..... 49
  - Call
    - Accept/end ..... 21
    - Charges ..... 30
    - Conference ..... 22
    - Divert ..... 44
    - End ..... 21
    - Hold ..... 22
    - Mute ..... 23
    - Options ..... 23
    - Reject ..... 21
    - Swap (change) ..... 22
    - Video ..... 20
    - Waiting ..... 22
  - Call log lists ..... 29
  - Call waiting on/off ..... 44
  - Calling ..... 20
  - Camera ..... 30
    - Key ..... 6
    - Lens front/back ..... 6
    - Settings ..... 30
    - Take picture/video ..... 30
  - Care and maintenance ..... 57
  - Case sensitivity (T9) ..... 18
  - Cell broadcast (CB)
    - Receive ..... 33
    - Settings ..... 37
  - Charges ..... 30
  - Charging time ..... 10
  - Clock ..... 46
  - Conference ..... 22
  - Connection profiles ..... 43
  - Connectivity ..... 42
  - Contacts ..... 25
    - Distribution list ..... 28
    - Groups ..... 27
    - New entry ..... 25
    - New SIM entry ..... 27
  - Content download prompt ..... 48
  - Content expiration warning ..... 48
  - Control code (DTMF) ..... 24
  - Create messages ..... 31
  - Currency converter ..... 51
- D**
- Data counter ..... 43
  - Date format ..... 47
  - Declaration of conformity ..... 58
  - Device manager ..... 46
  - Dialling code ..... 21
  - Dialling with number keys ..... 21
  - Dictating machine ..... 49
  - Digital Rights Management ..... 13
  - Display ..... 41
    - Brightness ..... 41
    - Greeting message ..... 41
    - Language ..... 45
    - Logo ..... 41
    - Power save ..... 41
    - Screensaver ..... 41
    - Symbols ..... 7
    - Wallpaper ..... 41
  - Distribution list ..... 28
  - Divert calls ..... 44
  - Download ..... 39
  - DTMF tones (tone sequences) ..... 24
  - Duration/charges ..... 30

- E**
- E-mail
    - Create ..... 32
    - Retrieve ..... 34
    - Settings ..... 37
  - Emergency number ..... 11
  - Extras ..... 50
- F**
- Fast access ..... 43
  - Fast list search ..... 14
  - Fax/data ..... 43
  - File system ..... 46
  - Flash ..... 31
  - FM radio ..... 50
- G**
- Games ..... 40
  - GPRS ..... 43
  - Greeting message ..... 41
  - Guarantee certificate ..... 60
- H**
- Handset volume ..... 21
  - Handsfree talking ..... 22
  - Headset settings ..... 49
  - Hide ID on/off ..... 44
  - Hold call ..... 22, 24
  - Hotline ..... 55
- I**
- IMEI number ..... 46
  - Inbox ..... 33
  - Info tones ..... 45
  - Input language ..... 18, 45
  - Instant message ..... 32
  - Internet ..... 38
    - Profiles ..... 43
  - IrDA ..... 42
- K**
- Key lock ..... 6
    - Automatically ..... 47
  - Key tones ..... 45
- L**
- Language ..... 45
  - Linger time ..... 43
  - Logo ..... 41
  - Lost of phone, SIM card ..... 58
- M**
- Mailbox ..... 38
  - Main menu ..... 13
  - Maintenance of phone ..... 57
  - Mark mode ..... 15
  - Master reset ..... 46
  - Media player ..... 51
    - Bookmark ..... 53
    - Music ..... 52
    - Pictures ..... 52
    - Video ..... 52
  - Memory assistant ..... 15
  - Message
    - E-mail ..... 32
    - Instant message ..... 32
    - MMS ..... 31
    - SMS ..... 31
  - Microphone on/off ..... 23
  - Missed calls (log list) ..... 29
  - MMS
    - Create ..... 31
    - Receive ..... 33
    - Settings ..... 36
  - Mobile Phone Manager ..... 54
  - MultiMediaCard ..... 9
    - Eject card ..... 46
  - Music ..... 52
  - Muting (microphone) ..... 23
  - My Stuff ..... 53
- N**
- Navigation key ..... 13
  - Network ..... 48
    - Auto network ..... 48
    - Band selection ..... 48
    - Choose ..... 48
    - Fast search ..... 48
    - Info ..... 48
    - Preferred network ..... 48
- O**
- Offline mode ..... 12
  - Only protected SIM ..... 47
  - Operating time ..... 10
    - Battery ..... 58
  - Organizer ..... 49
  - Overview phone ..... 5

- P**
- PC connection..... 17
  - Phone
    - Overview..... 5
    - Settings..... 40
    - Technical data..... 58
  - Phone code..... 16
  - Phone identity number (IMEI)..... 46
  - Picture
    - Media player..... 52
    - Take..... 30
  - PIN
    - Change..... 16
    - Control..... 16
    - Enter..... 11
    - Phone code..... 16
  - PIN2..... 16
  - Power save..... 41
  - Preventing accidental activation..... 17
  - Product data..... 58
  - Profiles..... 40
  - PUK, PUK2..... 16
- R**
- Radio..... 50
  - Redial..... 21
  - Remote sync..... 49
  - Ringtones..... 40
- S**
- Safety precautions..... 2
  - Screensaver..... 41
  - Security
    - Codes..... 16
    - Settings..... 47
  - Settings..... 40
  - Short cuts..... 43
  - Short message (SMS)..... 31
  - Show clock..... 47
  - Shutdown animation..... 41
  - Signal strength..... 12
  - Silent alert..... 41
  - SIM card
    - Clear barring..... 17
    - Insert..... 8
    - Toolkit..... 50
  - SMS
    - Create..... 31
    - Receive..... 33
    - Settings..... 36
  - SOS..... 11
  - Sound recorder..... 51
  - Special characters..... 18
  - Standard functions..... 14
  - Standby mode..... 12
  - Standby time..... 10, 58
  - Startup animation..... 41
  - Stopwatch..... 51
  - Swap calls..... 22
  - Switch on/off phone..... 11
  - Symbols..... 7
- T**
- T9
    - On/off..... 45
    - Text entry..... 18
  - Tabs..... 13
  - Talk time (battery)..... 58
  - Task switching..... 15
    - Key..... 5
  - Technical data..... 58
  - Templates..... 20
  - Text entry
    - Edit Menu..... 18
    - Input language..... 18
    - With T9..... 18
    - Without T9..... 17
  - Text module..... 20
  - Themes..... 40
  - This SIM only..... 47
  - Time format..... 47
  - Time zone..... 12, 47
  - Time/Date..... 12, 46
- U**
- User guide symbols..... 13

**V**

Vibration .....	41
Video	
Media player.....	52
Record.....	30
Video call	
Accept.....	21
End .....	21
Key.....	5
Options .....	23
Settings.....	45
Voice dialling .....	29
Activate.....	29
On/off .....	45
Record voice tag .....	29
Voice message (mailbox) .....	38
Volume	
Handset volume .....	21
Keys .....	6

**W**

Wallpaper (display).....	41
WAP .....	38
WAP push.....	33
Wildcard.....	26